


TOLERANCE +/- 0.1 IN [+/-0.3 MM]
 ALL DIMENSIONS IN INCHES [MM]

*OPTIONAL FUSEHOLDER KIT (P/N FSFH1) WILL
 ADD 0.71"[18 MM] TO THE WIDTH

				CAT.NO. DCE1500PH																			
1500 VA		50/60 Hz		95 °C RISE		LR3902																	
npl404c-dt		<table border="0"> <tr> <td>240V</td> <td>HV</td> <td>480V</td> <td></td> </tr> <tr> <td>1 3 2 4</td> <td></td> <td>1 3 2 4</td> <td></td> </tr> <tr> <td>120V</td> <td>LV</td> <td>240V</td> <td></td> </tr> <tr> <td>4 2 3 1</td> <td></td> <td>4 2 3 1</td> <td></td> </tr> </table>		240V	HV	480V		1 3 2 4		1 3 2 4		120V	LV	240V		4 2 3 1		4 2 3 1				 LISTED 252L E50394 130-9	
240V	HV	480V																					
1 3 2 4		1 3 2 4																					
120V	LV	240V																					
4 2 3 1		4 2 3 1																					
H1		H3		H2		H4																	
X4		X2		X3		X1																	
MADE IN CHINA																							

NOTES:

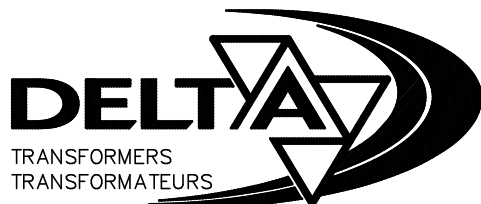

TITLE: 1 PH ENCLOSED GENERAL PURPOSE TX

DES:	WWONG
DATE:	12/03/07
SCALE:	NTS

SHEET 1 OF 1

EDBDCE1500PH